# WH-8A


## MEC 5-AXIS CNC DUAL-POINT COILING MACHINE

For wire diameters of Ø0.2 ~ Ø0.8 mm

The WH-8A has upgraded user-friendly controls, advanced mechanics, and advanced IOT technology while remaining cost effective.

Outer coil diameters up to ø28 mm are available.

MNO2 (MEC New Operation 2) allows the user to easily create programs for multiple shapes, and our AUTOMATIC PROGRAMMING feature reduces setup times.

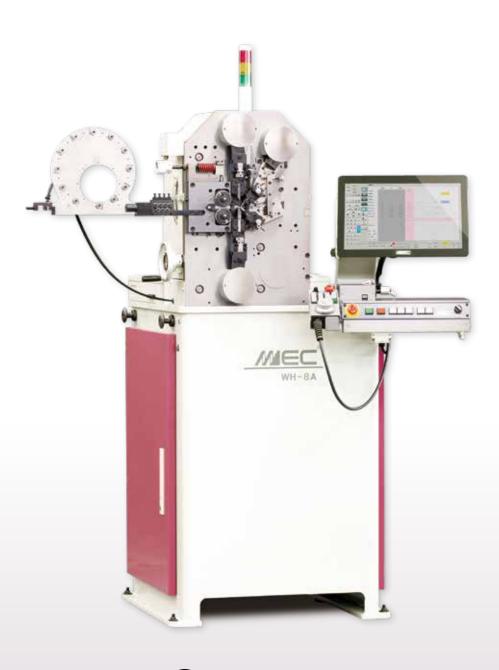

Compression spring

Click here for processing video



MADA



#### Features

#### • 5-axis control with an emphasis on operability


This 5-axis control function gives smooth control of feed, cut, wedge-pitch, push-pitch, and outer coil diameter. The crank slide mechanism allows for high-speed production. By incorporating the mechanical parts into the machine, you have more control of the coiling space within the mechanical frame.

#### Support for IOT

The operating status of machine can be monitored through mobile phones or computers, and regular maintenance with preventive maintenance functions can contribute to improved production efficiency.

#### Optional equipment

Unit for left-hand coiling, bracket for initial tension servo motor, single point, and contact sensor for coil length measure are available as optional features.




**Dual points area for right-hand coils** Simple & user-friendly

## Improved operability with the MNO2 (MEC New Operation 2) programming software


The MEC original spring program MNO2 easily organizes important statistics about the machine, including program flow, operating status of each axis, inputs/outputs, jump, etc., as with our other spring machines. The program editing function has greatly evolved, and the navigation system function and touch screen make it easier to create programs and shorten the setup time. The coil number program allows to easily change feed, pitch, outer coil diameter, and initial tension on the advanced pitch diagram screen, making it easier to adjust basic coils.

In addition to the automatic coil length correction function, based on the capacitance length measurement method, the multi-functional production manager system makes production easy to control.



**Program for number of coils** (cylindrical coils)
The program makes easy to adjust the basic coils.

### Specifications

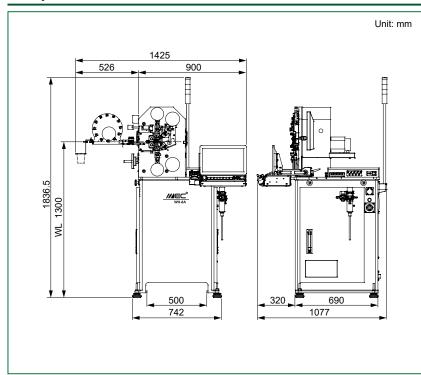

Specifications are subject to change without notice for product improvement.

Machine name	WH-8A
Wire diameter	ø0.2 ~ ø0.8 mm
Outer coil diameter	ø28 mm
Index	D/d 4 or more
Feed axis	0.001 mm
Max feed speed	282 m/min
Cut axis*	0.001°
Wedge-pitch axis*	0.0001 mm
Push-pitch axis*	0.0001 mm
Point axis*	0.0001 mm
Solenoid valves	4 pcs (Max 8 pcs)
Max air pressure	0.5 MPa
Power source	3-phase, AC 200V, 15A
Net weight	370 kg
Control device	Windows
Software	MNO2
Display	15.6" Full HD touch screen
External memory	USB Thumb drive
Temperature	5 ~ 40°C

Resolution: Program input unit, which does not represent accuracy.

1-17-24 Kamiaoki Nishi, Kawaguchi, Saitama, 333-0845 Japan

TEL: +81-48-256-3511 FAX: +81-48-256-3595

